





DIMENSIONS

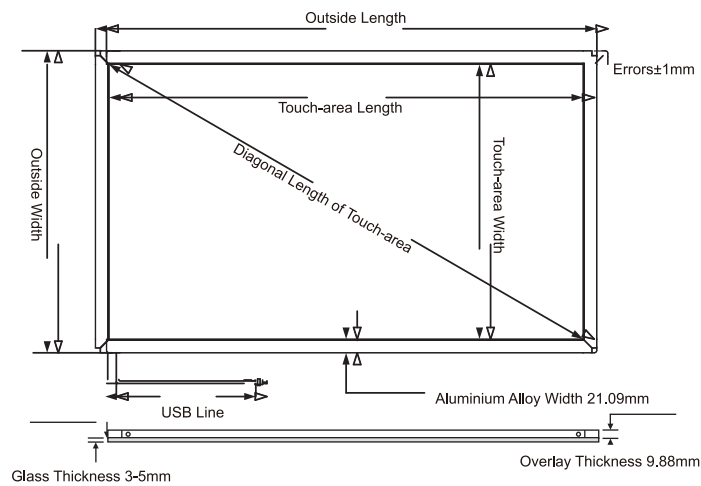

Inch	Touch Active Area			Outside Dimensions	
	(Length)	(Width)	( Diagonal )	(Length)	(Width)
32	707	396	810	749.2	438.2
42	934	528	1073	976.2	570.2
46	1023	576	1174	1065.2	618.2
47	1047	588	1201	1089.2	630.2
50	1113	629	1278	1155.2	671.2
52	1155	653	1327	1197.2	695.2
55	1220	689	1401	1262.2	731.2
65	1447	814	1660	1489.2	856.2
72	1602	904	1839	1644.2	946.2
85	1889	1065	2169	1931.2	1107.2
92	2044	1155	2348	2086.2	1197.2
103	2289	1292	2628	22331.2	1334.2

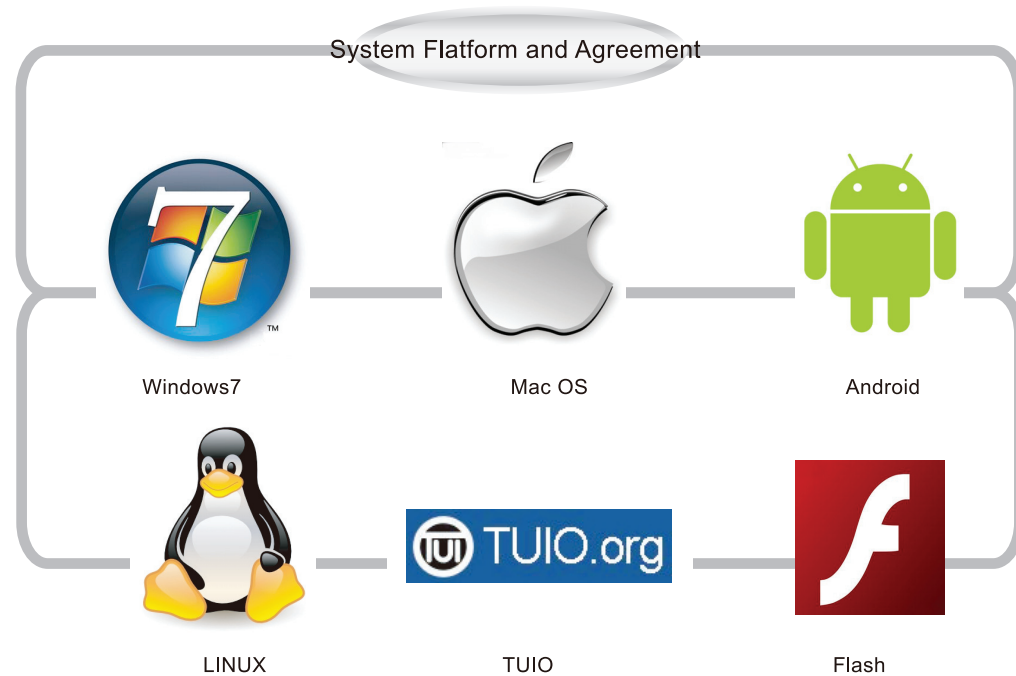

S series Infrared Multi-Touch screen of IRMTOUCH has the super narrow frame.

S series products support 2 - 4 - 6 - 10 - 16 - 32 - 64 points etc., which have the high compatibility and are special for Touching Screen Query machine, Touch Advertising machine, Interactive Electronic Board, Business all-in-one PC products because of the narrow frame.

Functional Parameter	Touch Points	2 - 4 - 6 - 10 - 16 - 32 - 64 points etc.
	Resolution	32768 x 32768
	Linearity err	±1mm
	Authentication	CE、ROHS
	Response time	6ms-20ms
	Drifting	No drifting
	Support Agreement	WIN7、Flash、TUIO etc.
	System	Windows XP、Windows 7、Mac OS、Linux、Android etc.
	Min.touch diameter	≥5mm
Luminousness	100% (no glass)、AR Glass 92%、Common Toughened Glass90%	
Environment Parameter	Temperature	0℃~60℃ Operating: 0℃~60℃ -40℃~60℃ Storage: -40℃~60℃
	Humidity	10%~90%RH Operating: 10%~90%RH 10%~90%RH Storage: 10%~10%RH
	IP Grade	IP65(Selectable)
	Light Resistance	Ambient light resistance
Electric Parameters	Operating Voltage	+5VDC, Allowed+4.75V~
	Power Mode	USB
	Power Consumption	1W~ 5 W
	Electrostatic protection grade	Air Discharge: +4KV, Touch Discharge: +2KV
	Interface	USB2.0
Mechanical Capacity	Input Method	All the block light object, such as fighters, pen, palm etc.
	Touch Times	Unlimited
	Touch Active power	No need
	Safety	selecting different toughened glass on the basis of safety grade.
	Noise	No noise
Surface Durability	The surface rigidity is same as glass. 5.0-7.0GN/m <sup>2</sup>	

UNLEASH YOUR IMAGINATION WITH IRMT DISPLAYS  
Infrared Multi Touch Screens for multi applications

